

Vibration eliminators with copper ends

Rev 140328

Vibration eliminators


Wiroflex stainless steel annular corrugated metalhose with stainless steel wire braid with copper ends braised on to stainless steel ferrules. Copper ends for internal soldering.



	Innerdia	Max work. pressure	Innerdia. hose	Total length	Length pipe ends
Partno	D1 (In.)	(Bar)	m(m)	TL +/- 5mm	(mm)
WFL-0014	1/4	35	1/4	191	19
WFL-0038	3/8	35	3/8	210	19
WFL-0012	1/2	35	1/2	229	19
WFL-0058	5/8	35	5/8	248	22
WFL-0034	3/4	35	3/4	254	29
WFL-0078B	OD 7/8"	35	7/8"	145	32
WFL-0078	7/8	35	7/8	292	32
WFL-0118B	OD 1 1/8	35	1 1/8	215	38
WFL-0118	1 1/8	35	1 1/8	330	38
WFL-0138	1 3/8	35	1 3/8	375	40
WFL-0158	1 5/8	35	1 5/8	432	51
WFL-0218	2 1/8	27	2 1/8	508	60
WFL-0258	2 5/8	24	2 5/8	610	76
WFL-0318	3 1/8	21	3 1/8	686	84

Max test pressure 1,5 x working pressure
Max burst pressure 5 x working pressure

1 Innertube 316L 3 Ferrules AISI 304
2 Braiding AISI 304 4 Copper ends In.

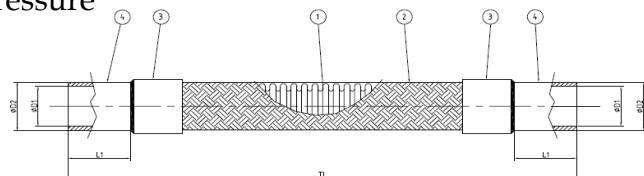

Headoffice
Specma Wiro AB
Box 245
591 23 Motala
Sweden

Tel: +46 141520 20
Fax: +46 141565 96
Mail: info@wiro.se
Web: www.wiro.se

Tel: +45 4717 66 55
Fax: +45 4717 66 50
Mail: info@wiro.se
Web: www.wiro.se

